


Housing & installation data

Hallite 87 & 506 bearing strip

Hallite 87 strip is a low friction PTFE & Bronze compound produced in a flat tape style ready for easy cutting to size to suit individual applications and is particularly effective in friction conscious applications such as servo cylinders.

Hallite 506 can be supplied in spiral lengths, generally in 10 metre, as individual cut bearings and also in 10 metre lengths packed flat in a box dispenser. Hallite506 bearing strip is manufactured to extremely accurate thickness tolerances, ensuring reliable cylinder alignment. Other sizes of type 506 are available on request, special sections and diameters can also be produced to suit individual requirements.

Bearing Type	Standard material
87	PTFE + Bronze
506	Polyester + PTFE

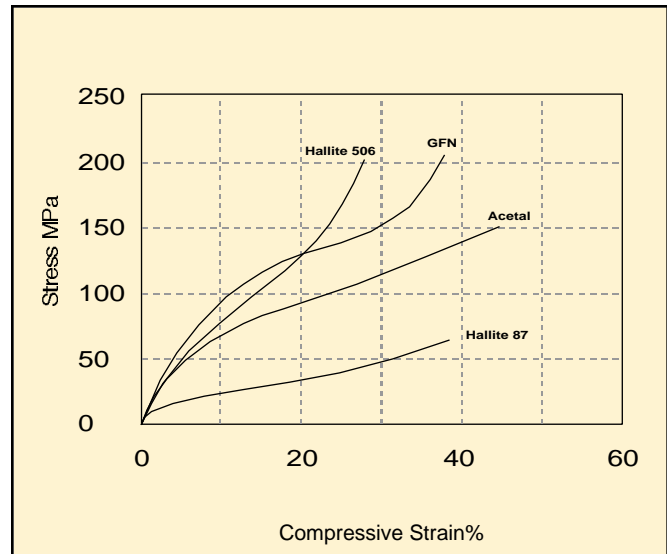

Compressive bearing stress versus strain for non metallic materials

Bearing strip housing tolerances

As tolerances are not specified "on line" for types 87 & 506, please refer to the information below for tolerances

Hallite 506 specified tolerances		
	Bearing length L ₁	Bearing cross section S
Tolerances (mm)	-0.1 to -0.6	-0.02 to -0.1

Hallite 506 specified tolerances		
	Bearing length L ₁	Bearing cross section S
Tolerances (in.)	-0.005 to -0.015	-0.001 to -0.004

Type 506 & 87 specified tolerances					
Nominal dimension range (mm)		Tolerances (units 0.001 mm)			
over	to	f9	H9	H10	H11
10	18	-16 -59	+43 0	+70 0	+110 0
18	30	-20 -72	+52 0	+84 0	+130 0
30	50	-25 -87	+62 0	+100 0	+160 0
50	80	-30 -104	+74 0	+120 0	+190 0
80	120	-36 -123	+87 0	+140 0	+220 0
120	180	-43 -143	+100 0	+160 0	+250 0
180	250	-50 -165	+115 0	+185 0	+290 0
250	315	-56 -186	+130 0	+210 0	+320 0
315	400	-62 -212	+140 0	+230 0	+360 0
400	500	-68 -223	+155 0	+250 0	+400 0
500	630	-76 -251	+175 0	+280 0	+440 0
630	800	-80 -280	+200 0	+320 0	+500 0
800	1000	-86 -316	+230 0	+360 0	+560 0

Type 506 & 87 specified tolerances					
Nominal dimension range (in.)		Tolerances (units 0.001 in.)			
over	to	f9	H9	H10	H11
0.40	0.71	-0.6 -2.3	+1.6 0	+2.8 0	+4.0 0
0.71	1.19	-0.8 -2.8	+2.0 0	+3.5 0	+5.0 0
1.19	1.97	-1.0 -3.4	+2.5 0	+4.0 0	+6.0 0
1.97	3.15	-1.2 -4.1	+3.0 0	+4.5 0	+7.0 0
3.15	4.73	-1.4 -4.8	+3.5 0	+5.0 0	+9.0 0
4.73	7.09	-1.6 -5.6	+4.0 0	+6.0 0	+10.0 0
7.09	9.85	-2.0 -6.5	+4.5 0	+7.0 0	+12.0 0
9.85	12.41	-2.2 -7.3	+5.0 0	+8.0 0	+12.0 0
12.41	15.75	-2.5 -8.3	+6.0 0	+9.0 0	+14.0 0
15.75	19.69	-2.8 -8.8	+6.0 0	+10.0 0	+16.0 0
19.69	24.80	-3.0 -9.9	+6.9 0	+11.0 0	+17.3 0
24.80	31.49	-3.1 -11.0	+7.9 0	+12.6 0	+19.7 0
31.49	39.37	-3.4 -12.4	+9.1 0	+14.2 0	+22.0 0



Housing & installation data

Specified tolerances

Nominal sizes mm		Shafts (outside diameter) Units 0.001 mm									Bores (outside diameter) Units 0.001 mm			
over	to	f8	f9	h8	h9	h10	h11	js10	js11	H8	H9	H10	H11	Js11
1.6	3	-6 -20	-6 -31	0 -14	0 -25	0 -40	0 -60	+20 -20	+30 -30	+14 0	+25 0	+40 0	+60 0	+30 -30
3	6	-10 -28	-10 -40	0 -18	0 -30	0 -48	0 -75	+24 -24	+37.5 -37.5	+18 0	+30 0	+48 0	+75 0	+37.5 -37.5
6	10	-13 -35	-13 -49	0 -22	0 -36	0 -58	0 -90	+29 -29	+45 -45	+22 0	+36 0	+58 0	+90 0	+45 -45
10	18	-16 -43	-16 -59	0 -27	0 -43	0 -70	0 -110	+35 -35	+55 -55	+27 0	+43 0	+70 0	+110 0	+55 -55
18	30	-20 -53	-20 -72	0 -33	0 -52	0 -84	0 -130	+42 -42	+65 -65	+33 0	+52 0	+84 0	+130 0	+65 -65
30	50	-25 -64	-25 -87	0 -39	0 -62	0 -100	0 -160	+50 -50	+80 -80	+39 0	+62 0	+100 0	+160 0	+80 -80
50	80	-30 -76	-30 -104	0 -46	0 -74	0 -120	0 -190	+60 -60	+95 -95	+46 0	+74 0	+120 0	+190 0	+95 -95
80	120	-36 -90	-36 -123	0 -54	0 -87	0 -140	0 -220	+70 -70	+110 -110	+54 0	+87 0	+140 0	+220 0	+110 -110
120	180	-43 -106	-43 -143	0 -63	0 -100	0 -160	0 -250	+80 -80	+125 -125	+63 0	+100 0	+160 0	+250 0	+125 -125
180	250	-50 -122	-50 -165	0 -72	0 -115	0 -185	0 -290	+92 -92	+145 -145	+72 0	+115 0	+185 0	+290 0	+145 -145
250	315	-56 -137	-56 -186	0 -81	0 -130	0 -210	0 -320	+105 -105	+160 -160	+81 0	+130 0	+210 0	+320 0	+160 -160
315	400	-62 -151	-62 -202	0 -89	0 -140	0 -230	0 -360	+115 -115	+180 -180	+89 0	+140 0	+230 0	+360 0	+180 -180
400	500	-68 -165	-68 -223	0 -97	0 -155	0 -250	0 -400	+125 -125	+200 -200	+97 0	+155 0	+250 0	+400 0	+200 -200
500	630	-76 -186	-76 -251	0 -110	0 -175	0 -280	0 -440	+140 -140	+220 -220	+110 0	+175 0	+280 0	+440 0	+220 -220
630	800	-80 -205	-80 -280	0 -125	0 -200	0 -320	0 -500	+160 -160	+250 -250	+125 0	+200 0	+320 0	+500 0	+250 -250

Nominal sizes in.		Shafts (outside diameter) Units 0.001 in.									Bores (outside diameter) Units 0.001 in.			
over	to	f8	f9	h8	h9	h10	h11	js10	js11	H8	H9	H10	H11	Js11
0.04	0.12	-0.3 -0.9	-0.3 -1.2	0 -0.6	0 -1.0	0 -1.6	0 -2.5	+0.8 -0.8	+1.3 -1.3	+0.6 0	+1.0 0	+1.6 0	+2.5 0	+1.3 -1.3
0.12	0.24	-0.4 -1.1	-0.4 -1.6	0 -0.7	0 -1.2	0 -1.8	0 -3.0	+0.9 -0.9	+1.5 -1.5	+0.7 0	+1.2 0	+1.8 0	+3.0 0	+1.5 -1.5
0.24	0.40	-0.5 -1.4	-0.5 -1.9	0 -0.9	0 -1.4	0 -2.2	0 -3.5	+1.1 -1.1	+1.8 -1.8	+0.9 0	+1.4 0	+2.2 0	+3.5 0	+1.8 -1.8
0.40	0.71	-0.6 -1.6	-0.6 -2.3	0 -1.0	0 -1.6	0 -2.8	0 -4.0	+1.4 -1.4	+2.0 -2.0	+1.0 0	+1.6 0	+2.8 0	+4.0 0	+2.0 -2.0
0.71	1.19	-0.8 -2.0	-0.8 -2.8	0 -1.2	0 -2.0	0 -3.5	0 -5.0	+1.8 -1.8	+2.5 -2.5	+1.2 0	+2.0 0	+3.5 0	+5.0 0	+2.5 -2.5
1.19	1.97	-1.0 -2.6	-1.0 -3.4	0 -1.6	0 -2.5	0 -4.0	0 -6.0	+2.0 -2.0	+3.0 -3.0	+1.6 0	+2.5 0	+4.0 0	+6.0 0	+3.0 -3.0
1.97	3.15	-1.2 -3.0	-1.2 -4.1	0 -1.8	0 -3.0	0 -4.5	0 -7.0	+2.3 -2.3	+3.5 -3.5	+1.8 0	+3.0 0	+4.5 0	+7.0 0	+3.5 -3.5
3.15	4.73	-1.4 -3.6	-1.4 -4.8	0 -2.2	0 -3.5	0 -5.0	0 -9.0	+2.5 -2.5	+4.5 -4.5	+2.2 0	+3.5 0	+5.0 0	+9.0 0	+4.5 -4.5
4.73	7.09	-1.6 -4.1	-1.6 -5.6	0 -2.5	0 -4.0	0 -6.0	0 -10.0	+3.0 -3.0	+5.0 -5.0	+2.5 0	+4.0 0	+6.0 0	+10.0 0	+5.0 -5.0
7.09	9.85	-2.0 -4.8	-2.0 -6.5	0 -2.8	0 -4.5	0 -7.0	0 -12.0	+3.5 -3.5	+6.0 -6.0	+2.8 0	+4.5 0	+7.0 0	+12.0 0	+6.0 -6.0
9.85	12.41	-2.2 -5.2	-2.2 -7.3	0 -3.0	0 -5	0 -8.0	0 -12.0	+4.0 -4.0	+6.0 -6.0	+3.0 0	+5.0 0	+8.0 0	+12.0 0	+6.0 -6.0
12.41	15.75	-2.5 -6.0	-2.5 -8.0	0 -3.5	0 -6.0	0 -9.0	0 -14.0	+4.5 -4.5	+7.0 -7.0	+3.5 0	+6.0 0	+9.0 0	+14.0 0	+7.0 -7.0
15.75	19.69	-2.8 -6.5	-2.8 -8.8	0 -4.0	0 -6.0	0 -10.0	0 -16.0	+5.0 -5.0	+8.0 -8.0	+4.0 0	+6.0 0	+10.0 0	+16.0 0	+8.0 -8.0
19.69	24.80	-3.0 -7.0	-3.0 -9.9	0 -4.3	0 -6.9	0 -11.0	0 -17.3	+5.5 -5.5	+8.7 -8.7	+4.3 0	+6.9 0	+11.0 0	+17.3 0	+8.7 -8.7
24.80	31.49	-3.1 -8.1	-3.1 -11.0	0 -4.9	0 -7.9	0 -12.6	0 -19.7	+6.3 -6.3	+9.8 -9.8	+4.9 0	+7.9 0	+12.6 0	+19.7 0	+9.8 -9.8