


LWS31



COMPONENTS:

- 1 Rotating contact surface
- 2 Stationary contact surface
- 3a O-rings
- 3b O-rings
- 3c Elastomeric cup
- 3d Elastomeric cup
- 4 Springs
- 5 Metal frame

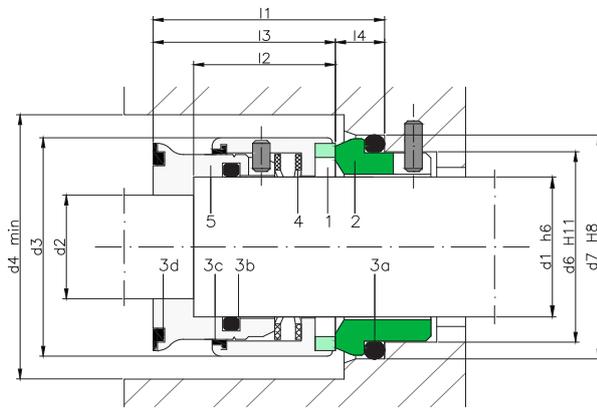

SECTORS:



CHARACTERISTICS:

- **Balanced.**
- Shaft fixing system **WITHOUT** screws.
- **Sentido rotación independiente.**

OPERATING LIMITS:

$d_1 = 20 \div 35 \text{ mm}$ $p = 35 \text{ kg/cm}^2$
 $v = 20 \text{ m/}$ $t = -40 \div +150^\circ\text{C}$ (*)

(*) The temperature resistance depends on the material of the secondary seals used.

The operating limits are defined by the PV factor which is determined for the sealing system characteristics and those of the application.

DESCRIPTION:

A wave spring mechanical seal in which the spring is isolated and protected from the product. Its hygienic design reduces the likelihood of traces of product being deposited on its surface, thereby eliminating the risk of contamination.

DIMENSIONS CHART

Dimension in mm

Shaft mm	Rotary part					Stationary part			Total length mm
	d ₂	d ₃	l ₄	l ₂	l ₃	d ₆	d ₇	l ₄	
20	13.5	34	39	23	29	29	35	8.5	37.5
25	18.5	39	44	24.5	31.5	34	40	8.5	40
35	22.5	49	54	26	34	44	50	8.5	42.5

Dimensions subject to changes or modifications.